



# FLOW SWITCH - *High Flow*

Adjustable Liquid Series - Range 0.5 l/min to 18 lpm



**FS5700 Series Flow Switch - *High Flow***  
**available with 1/4 and 1/2 NPT Connections**  
**with optional Explosion Proof Cap**

## FEATURES

- ◆ Fully Field Adjustable
- ◆ Operates in any Orientation
- ◆ Operating Temperature  
-40°F to +220°F  
(-40°C to +105°C)
- ◆ Operating Pressure  
1000 psig (68 bar)
- ◆ 316 Stainless Steel Construction
- ◆ Shock and Vibration Resistant
- ◆ Contamination Resistant
- ◆ 1/4 & 1/2 NPT Connections
- ◆ Optional Explosion Proof
- ◆ **CE** compliant

## Applications

- ◆ Chemical injection
- ◆ Metering pump integrator
- ◆ Coolant monitor
- ◆ Fire protection
- ◆ Chemical analyzers

The FS5700 Series Flow Switch - *High Flow* is designed to precisely detect increasing or decreasing flow rate of liquids for critical processes. The electrical switch is operated by a high energy permanent magnet. The permanent magnet is totally encapsulated by 316 stainless steel, utilizing the patented **Autoseal** process, providing a continuous, impenetrable barrier of 316 stainless steel, which is chemically resistant to even the most aggressive chemical action. The linear, high resolution adjustment allows for precise settings. The compact construction is ideal for high density system packaging.


# FS5700 Series

# FLOW SWITCH - High Flow Liquid

## SPECIFICATIONS

- ◆ Switch Assembly - SPDT UL 61760
- ◆ 100 VDC, 120 VAC max.
- ◆ 3 Watts resistive max. continuous
- ◆ 0.25 Amp. max. continuous
- ◆ 3.30 VA max. - 100 VDC
- ◆ 2.46 VA max. - 120 VAC
- ◆ 0.20 Ohm max contact resistance
- ◆ Adjustable Flow Rate Setpoint (see table)
- ◆ Fluid Media: Liquids including corrosives
- ◆ Pressure: 1000 psig max. (207 bar)
- ◆ Differential Pressure at set point:
  - 5, -8: 1.0 psi max.
  - 6, -9: 5.0 psi max.
- ◆ Operating Temperature:
  - 40°F to 220°F (-40°C to 105°C)
- ◆ Leakage: Zero
- ◆ Set Point Accuracy: ±1%
- ◆ Response Time: 10 milliseconds max.
- ◆ Deactuation (reset): less than 12% of actuation set point
- ◆ Internal Filter: 40 micron
- ◆ Materials:

Body and wetted parts: 316 St Stl  
 Spring: Inconel X  
 Seals: As specified

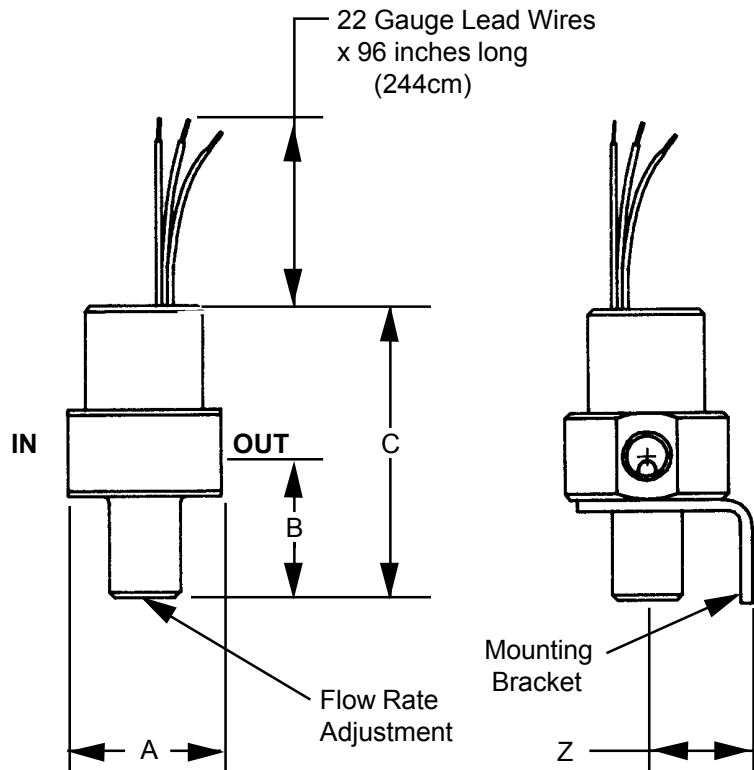

Series	Pressure Ports	Dimensions					Adjustable Flow Rate
		A	B	C	Z		
FS5704	1/4 NPT	1.63	1.56	3.12	1.13	-5	0.5 lpm - 2 lpm
						-6	0.5 lpm - 4 lpm
FS5708	1/2 NPT	2.25	2.24	3.89	1.63	-8	0.5 lpm - 9 lpm
						-9	0.5 lpm - 18 lpm

## ORDERING INFORMATION

Part Number Example: **FS5704 C V - 5 M X**

Basic Series: \_\_\_\_\_  
 FS5704 - 1/4 NPT  
 FS5708 - 1/2 NPT

Material: \_\_\_\_\_  
 C = 316 Stainless Steel

Seal Material: \_\_\_\_\_  
 V = Viton®  
 B = Buna - N  
 E = Ethylene Propylene  
 K = Kalrez®

\_\_\_\_\_ Optional Explosion Proof Cap  
 \_\_\_\_\_ Optional Mounting Bracket  
 \_\_\_\_\_ Adjustable Flow Range (see table)

## ELECTRICAL SCHEMATIC

